

Product Services Information

INSTALLATION INSTRUCTIONS

(Includes English, French, German, Spanish and Italian)

Mower Deck
42 Convertible
Front Blowout Baffle

BM20505

Parts in Kit

Qty.	Description
1	Front Blowout Baffle
3	Bolt, M6 x 16
1	Bolt, M8 x 20
3	Locknut, M6
1	Locknut, M8


NOTE: *This baffle is not compatible with the high performance mulch plug. When changing from bagging or side-discharge to mulching, the baffle will need to be removed when the mulching blades and plug are installed.*

Park Vehicle Safely

1. Drive tractor onto a level surface, not on a slope.
2. STOP the engine.
3. LOCK the park brake.
4. Remove the key.
5. Lock mower deck in the raised position using lift lever.

Install Front Blowout Baffle

1. Remove all grass build-up from top and bottom surfaces of mower deck.
2. Rinse deck lip thoroughly and dry completely.

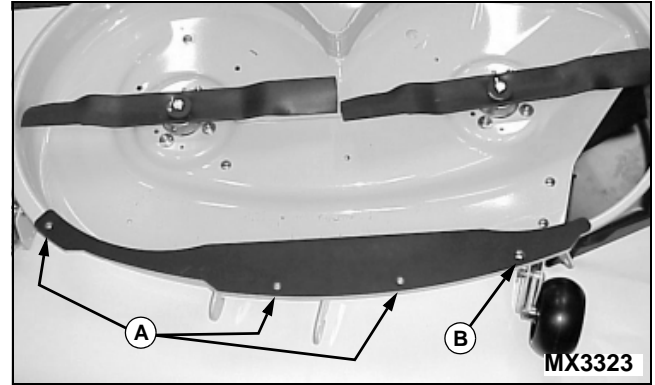

Picture Note: View of underside of mower deck is shown for proper positioning of the Front Blowout Baffle.

3. Position front blowout baffle as shown on front lip of mower deck.
4. Attach with three M6 x 16 bolts (A) and one M8 x 20 bolt (B) installed from the bottom of the deck. Secure with M6 and M8 locknuts at the top side of the deck. Tighten the nuts completely.