



JOHN DEERE

# Product Services Information

## INSTALLATION INSTRUCTIONS

(Includes English, French, German, Spanish and Italian)



JOHN DEERE

### FRONT FENDER GUARD KIT

#### Parts in Kit

Qty.	Description
1	Fender Guard, Left
1	Fender Guard, Right
2	Screw, M10x20
4	Screw, Hex, M8x60

**NOTE:** Retain these instructions with your machine operator's manual.


**Brush Guard kit must be installed before installing this kit. See your John Deere dealer for kit.**

#### Parking Safely

1. Stop vehicle on a level surface, not on a slope.
2. Lock park brake.
3. Stop engine.
4. Remove key.
5. Before you leave the operator's seat, wait for engine and all moving parts to stop.
6. Disconnect the negative battery cable or remove the spark plug wire (for gasoline engines) before servicing the machine.


#### Install Kit

1. Park machine safely. (See Parking Safely.)

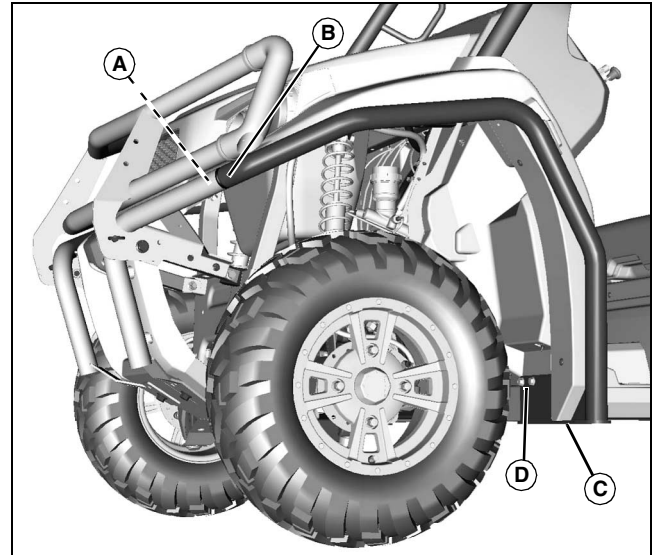

MX48884

2. Remove end plug (A) from left front brush guard tube.
3. Insert swaged end of left fender guard (B) into front brush guard, and position fender guard bracket (C) on machine frame.
4. Install two M8x60 screws (D) to secure fender guard to frame.

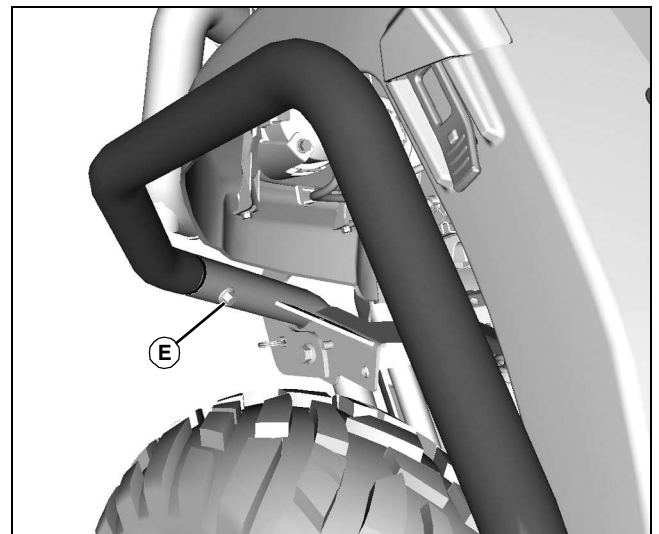

MX48885

5. Install one M10x20 screw (E) in front brush guard frame to secure fender guard.
6. Repeat to install right fender guard on machine.