



JOHN DEERE

Product Services Information

INSTALLATION INSTRUCTIONS

(Includes English, French, German, Spanish and Italian)



JOHN DEERE

DEFLECTOR PLATE KIT

Parts in Kit

Qty.	Description
1	Panel
3	Bolt
3	Locknut, Clamp-On
1	Wrap, High Temperature

NOTE: Retain these instructions with your machine operator's manual.

Parking Safely

1. Stop vehicle on a level surface, not on a slope.
2. Lock park brake.
3. Stop engine.
4. Remove key.
5. Before you leave the operator's seat, wait for engine and all moving parts to stop.
6. Disconnect the negative battery cable or remove the spark plug wire (for gasoline engines) before servicing the machine.


Install Kit

Install High Temperature Wrap




CAUTION: Avoid injury! Touching hot surfaces can burn skin. The engine, components, and fluids will be hot if the engine has been running. Allow the engine to cool before servicing or working near the engine and components.

1. Park machine safely.
2. Raise and secure cargo box.

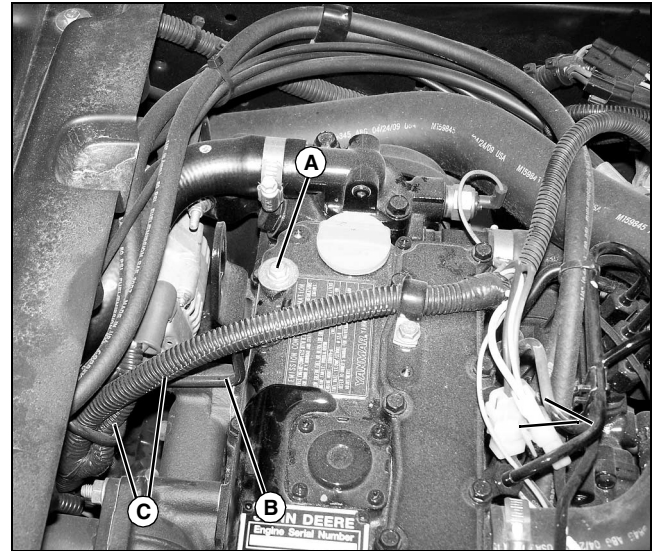

MX46467


3. Remove bolt (A) and washer, and bracket (B) from wiring harnesses (C).

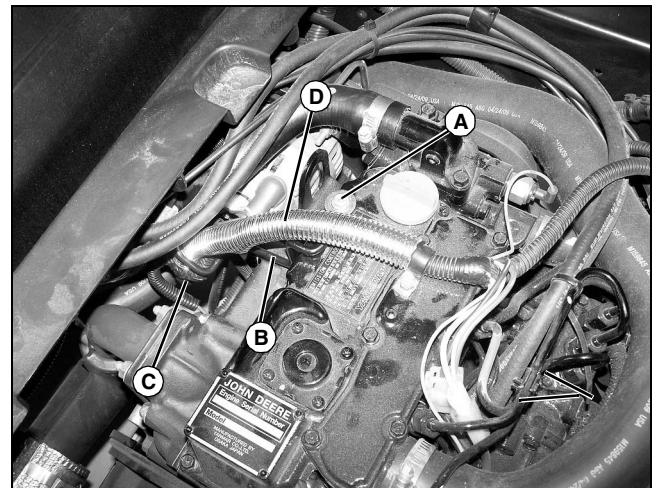

MX46468


4. Install wrap (D) onto wiring harnesses (C), and install bracket (B) with washer and bolt (A).

Install Panel

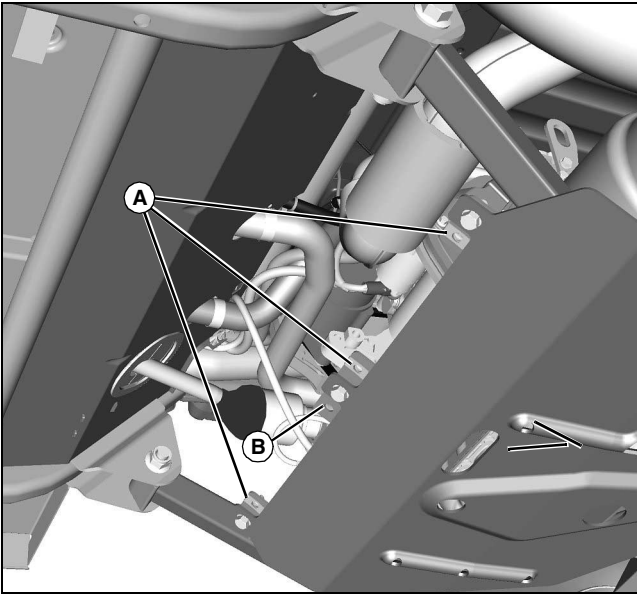

MX46379

1. Install three clamp-on locknuts (A) onto machine frame (B).

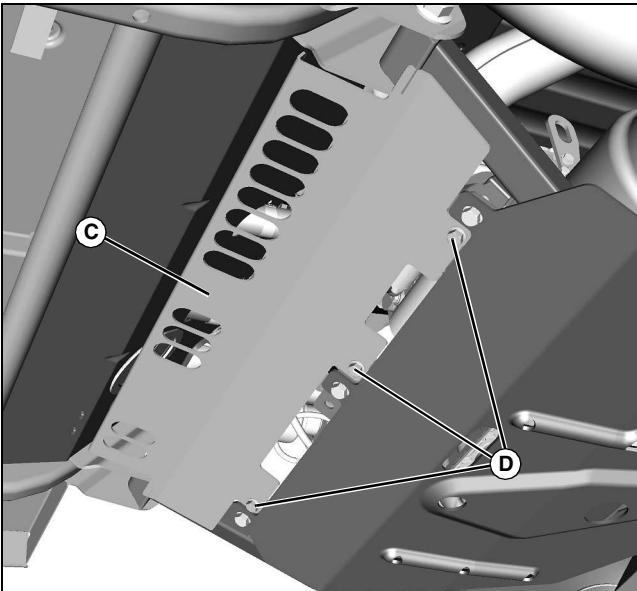

MX46380

2. Raise panel (C) into position, and align three holes in panel with three mounting holes with clamp-on nuts in bottom of machine.
3. Secure with three bolts (D).