

Steering Wheel Kit

BM23933



JOHN DEERE

INSTALLATION INSTRUCTIONS

Steering Wheel Kit

M164608 23MAR20 (ENGLISH)

XUV560E, XUV560E S4, XUV590E, XUV590M, XUV590E
S4, XUV590M S4 Gator™ Utility Vehicle

John Deere Horicon Works
M164608 (23MAR20)

PRINTED IN U.S.A.
COPYRIGHT © 2020
DEERE & COMPANY
Moline, Illinois

All rights reserved.
A John Deere ILLUSTRATION™ Manual

M164608-19-23MAR20

Parts in Kit

Quantity	Description
1	Steering Wheel
1	Washer
1	Nut, M16
1	Label

NOTE: Retain these installation instructions with the machine operator's manual.

OUO2005,0000795 -19-23MAR20-1/1

Parking Safely

Park the machine safely. See Parking Safely in your Operator's Manual.

MX88017,0000007 -19-17OCT19-1/1

Install Kit


1. Park machine safely. (See Parking Safely.)
2. Turn steering wheel so tires are pointing straight forward, parallel to machine.

Remove Steering Wheel

1. Remove cover.
2. Remove nut (A) and washer.
3. Remove steering wheel (B).

A—Nut

B—Steering Wheel

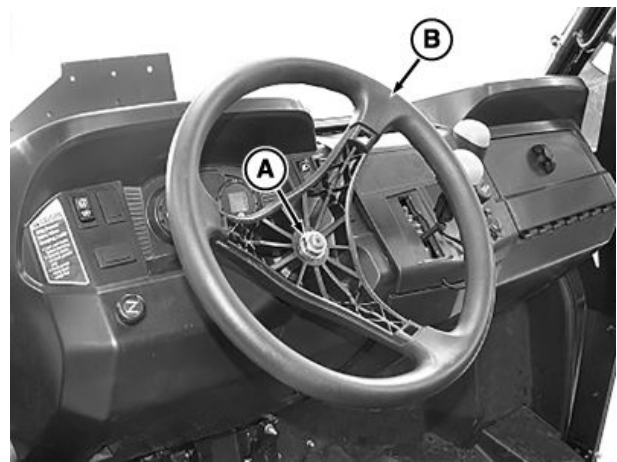

MX101027—UN—21MAR20

OUO2005,0000796 -19-23MAR20-1/3

Install Steering Wheel

1. Install steering wheel (A).
2. Install washer and nut (B).

A—Steering Wheel

B—Nut, M16



MX101028—UN—21MAR20

Continued on next page

OUO2005,0000796 -19-23MAR20-2/3

3. Install label (A).

- Verify that the hind leg on the deer symbol is tangent to screw (B) at 4:30 position on steering wheel, as shown.

A—Label

B—Screw



MX101029 —UN—21MAR20

OUC2005,0000796 -19-23MAR20-3/3