

# Cell Phone Mounting Bracket Kit

BRE10015



**JOHN DEERE**

## INSTALLATION INSTRUCTIONS

R538940 23MAR17 (ENGLISH)

6M, 6R, and 9RX Series Tractors

**John Deere Waterloo Works**  
**R538940 (23MAR17)**

PRINTED IN U.S.A.  
COPYRIGHT © 2017  
DEERE & COMPANY  
Moline, Illinois

All rights reserved.  
A John Deere ILLUSTRATION™ Manual

R538940-19-23MAR17



## Recognize Safety Information

This is a safety-alert symbol. When you see this symbol on your machine or in this manual, be alert to the potential for personal injury.

Follow recommended precautions and safe operating practices.



DX.ALERT -19-29SEP98-1/1

T81389 —UN—28JUN13

## Understand Signal Words

**DANGER;** The signal word DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

**WARNING;** The signal word WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

**CAUTION;** The signal word CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury. CAUTION may also be used to alert against unsafe practices associated with events which could lead to personal injury.

A signal word—DANGER, WARNING, or CAUTION—is used with the safety-alert symbol. DANGER identifies the most serious hazards. DANGER or WARNING safety signs are located near specific hazards. General



**▲ WARNING**

**▲ CAUTION**


precautions are listed on CAUTION safety signs. CAUTION also calls attention to safety messages in this manual.

DX.SIGNAL -19-05OCT16-1/1

TS187 —19—30SEP88

## Follow Safety Instructions

Carefully read all safety messages in this instruction. Read the product operators manual for operating instructions and safety messages. Do not let anyone operate without instruction. (A copy of the operators manual may also be available from the Service ADVISOR™ application.)

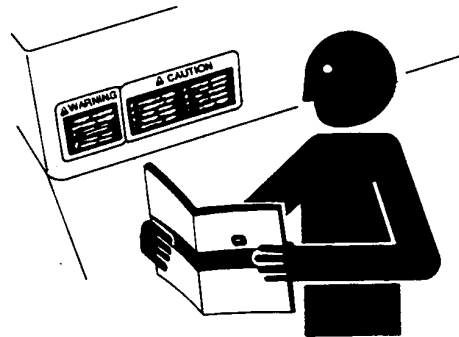

*Service ADVISOR is a trademark of Deere & Company*


DX.READ,INS -19-23JUN09-1/1

TS201 —UN—15APR13

### Park Machine Safely

Before working on the machine:

- Lower all equipment to the ground.
- Stop the engine and remove the key.
- Disconnect the battery ground strap.
- Hang a "DO NOT OPERATE" tag in operator station.

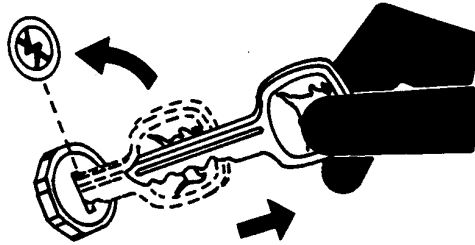

TSS230 —UN—24MAY89


DX,PARK -19-04JUN90-1/1

### Part List


Part Number	Description	Quantity
14M7274	Hex Nut	1
24H1305	Washer	2
R538940	Installation Instructions	1
RE343685	Knob, Threaded	1
RE558819	Tie Rod Assembly, Device Mount	1
RE558821	Ball Stud, Mounting	1
RE558822	Retainer, Cell Phone	1

NM61126,0000108 -19-27JAN16-1/1

### Install Cell Phone Mounting Bracket Assembly onto Corner Post

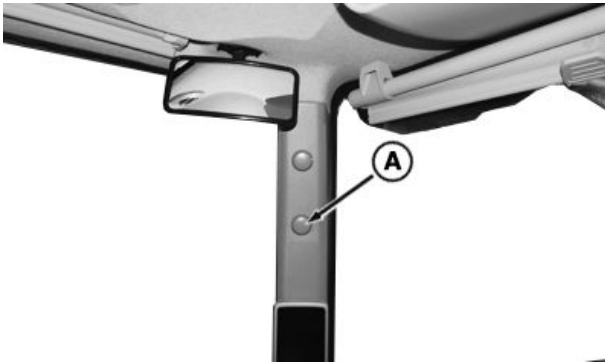

RXA0147509 —UN—04MAR15

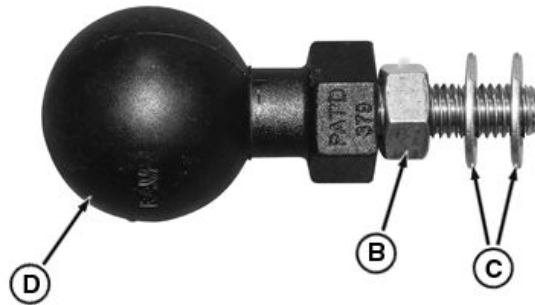

PY27215 —UN—19NOV15

A— Plug  
B— 14M7274 Hex Nut

C— 24H1305 Washer (2 used)

D— RE558821 Mounting Ball with Stud

1. Select desired corner post position and unscrew plug (A).


2. Install hex nut (B) and washers (C) onto mounting ball with stud (D) as shown.

Continued on next page

NM61126,0000109 -19-19NOV15-1/2



PY27216—UN—19NOV15

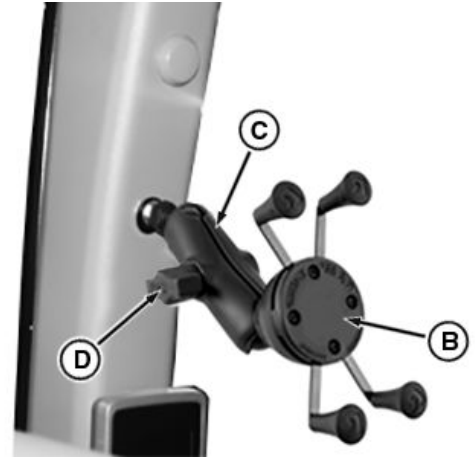

PY27217—UN—19NOV15

- A— RE558821 Mounting Ball with Stud**    **C—RE558819 Tie Rod Assembly or Double Socket Arm**    **D—RE343685 Knob, Threaded**  
**B— RE558822 Retainer, Cell Phone Holder**

3. Install mounting ball with stud (A) into corner post fitting. Tighten mounting ball hex nut against corner post fitting.
4. Loosen T-handle or knob (D) on double socket arm (C).
5. Install cell phone retainer (B) to double socket arm (C) and connect cell phone holder assembly onto mounting ball (A).
6. Place cell phone holder (B) in desired position and tighten T-handle or knob (D) on double socket arm (C) as shown.

NM61126.0000109 -19-19NOV15-2/2





