

# Self-Leveling Cup Holder Kit

BRE10152



**JOHN DEERE**

## INSTALLATION INSTRUCTIONS

### Self-Leveling Cup Holder Kit

R548826 21MAR19 (ENGLISH)

6M and 9RX Series Tractors

**John Deere Waterloo Works**  
**R548826 (21MAR19)**

PRINTED IN U.S.A.  
COPYRIGHT © 2019  
DEERE & COMPANY  
Moline, Illinois

All rights reserved.  
A John Deere ILLUSTRATION™ Manual

R548826-19-21MAR19



## Recognize Safety Information

This is a safety-alert symbol. When you see this symbol on your machine or in this manual, be alert to the potential for personal injury.

Follow recommended precautions and safe operating practices.



DX,ALERT -19-29SEP98-1/1

T81389 —UN—28JUN13

## Understand Signal Words

**DANGER;** The signal word DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

**WARNING;** The signal word WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

**CAUTION;** The signal word CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury. CAUTION may also be used to alert against unsafe practices associated with events which could lead to personal injury.

A signal word—DANGER, WARNING, or CAUTION—is used with the safety-alert symbol. DANGER identifies the most serious hazards. DANGER or WARNING safety signs are located near specific hazards. General

precautions are listed on CAUTION safety signs. CAUTION also calls attention to safety messages in this manual.



**▲ WARNING**


**▲ CAUTION**

DX,SIGNAL -19-05OCT16-1/1

TS187 —19—30SEP88

## Follow Safety Instructions

Carefully read all safety messages in this instruction. Read the product operators manual for operating instructions and safety messages. Do not let anyone operate without instruction. (A copy of the operators manual may also be available from the Service ADVISOR™ application.)

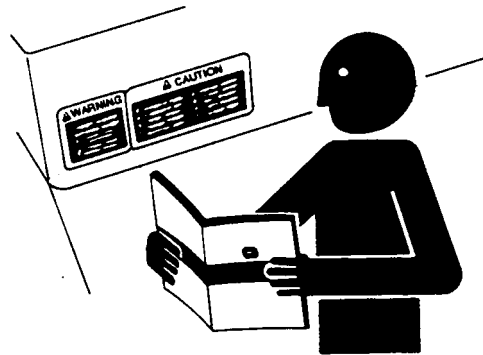

*Service ADVISOR is a trademark of Deere & Company*


DX,READ,INS -19-23JUN09-1/1

TS201 —UN—15APR13

## Park Machine Safely

Before working on the machine:

- Lower all equipment to the ground.
- Stop the engine and remove the key.
- Disconnect the battery ground strap.
- Hang a "DO NOT OPERATE" tag in operator station.

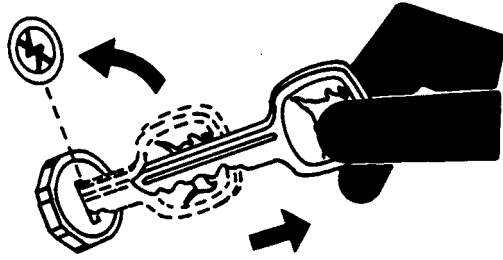

TS230—UN—24MAY89


DX,PARK -19-04JUN90-1/1

## Part List

Part Number	Description	Quantity
24H1305	Washer	2
R548826	Installation Instructions	1
R548829	Holder, Beverage Insulator	1
RE343685	Knob, Threaded	1
RE558819	Tie Rod Assembly, Device Mount	1
RE558821	Ball Stud, Mounting	1
RE570863	Holder, Cup Holder	1

NM61126,000010A -19-27JAN16-1/1

## Install Self-Leveling Cup Holder Kit Assembly onto C-Post RH Upholstery

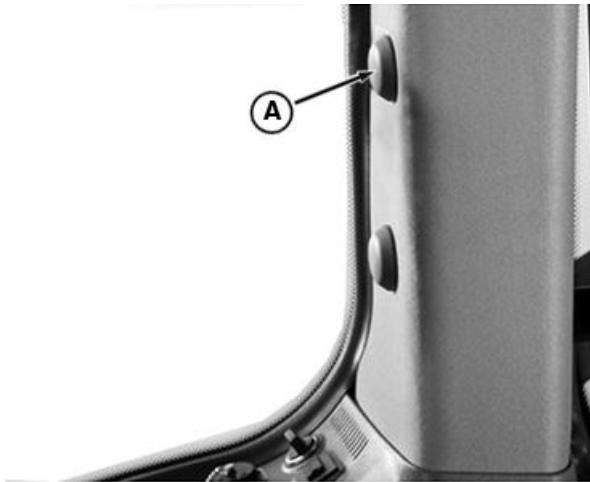

PY27218—UN—20NOV15



PY27220—UN—20NOV15


A— Plug  
 B— RE558821 Mounting Ball with Stud  
 C— 24H1305 Washer (2 used)

1. Unscrew the plug (A) on C-Post RH upholstery as shown.

2. Install washers (C) onto mounting ball with stud (B) as shown.

Continued on next page

NM61126,000010B -19-20NOV15-1/2

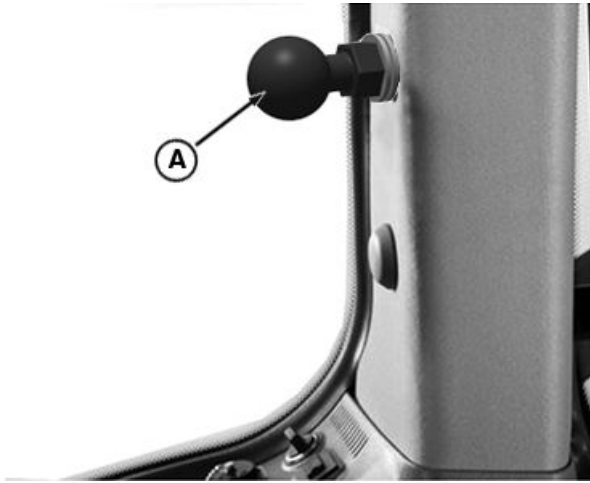

PY27219 —UN—20NOV15



PY27221 —UN—20NOV15

- A—RE558821 Mounting Ball with Stud**  
**B—RE570863 Holder, Cup Holder**  
**C—RE343685 Knob, Threaded**  
**D—RE558819 Tie Rod Assembly, Device Mount**  
**E—R548829 Holder, Beverage Insulator**

3. Install mounting ball with stud (A) into C-Post RH upholstery fitting.
4. Loosen T-handle or knob (C) on tie rod assembly (D).
5. Install cup holder assembly (B) and tie rod assembly (D) to mounting Ball (A) as shown.
6. Place the beverage insulator holder (E) into cup holder (B), desired position and tighten knob (C) on tie rod assembly (D) as shown.

NM61126,000010B -19-20NOV15-2/2





