

Tablet Mounting Bracket Kit

BRE10255



JOHN DEERE

INSTALLATION INSTRUCTIONS

R554835 23MAR17 (ENGLISH)

6M, 6R, 7R, 8R, 8RT, 9R, 9RT, and 9RX Series Tractors

John Deere Waterloo Works
R554835 (23MAR17)

PRINTED IN U.S.A.
COPYRIGHT © 2017
DEERE & COMPANY
Moline, Illinois

All rights reserved.
A John Deere ILLUSTRATION™ Manual
Previous Editions
Copyright © 2013

R554835-19-23MAR17

Recognize Safety Information

This is a safety-alert symbol. When you see this symbol on your machine or in this manual, be alert to the potential for personal injury.

Follow recommended precautions and safe operating practices.



DX.ALERT -19-29SEP98-1/1

T81389 —UN—28JUN13

Understand Signal Words

DANGER; The signal word DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

WARNING; The signal word WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

CAUTION; The signal word CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury. CAUTION may also be used to alert against unsafe practices associated with events which could lead to personal injury.

A signal word—DANGER, WARNING, or CAUTION—is used with the safety-alert symbol. DANGER identifies the most serious hazards. DANGER or WARNING safety signs are located near specific hazards. General



▲ WARNING

▲ CAUTION


precautions are listed on CAUTION safety signs. CAUTION also calls attention to safety messages in this manual.

DX.SIGNAL -19-05OCT16-1/1

TS187 —19—30SEP88

Follow Safety Instructions

Carefully read all safety messages in this instruction. Read the product operators manual for operating instructions and safety messages. Do not let anyone operate without instruction. (A copy of the operators manual may also be available from the Service ADVISOR™ application.)

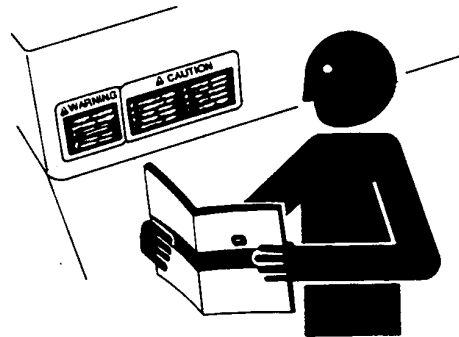

Service ADVISOR is a trademark of Deere & Company


DX.READ,INS -19-23JUN09-1/1

TS201 —UN—15APR13

Park Machine Safely

Before working on the machine:

- Lower all equipment to the ground.
- Stop the engine and remove the key.
- Disconnect the battery ground strap.
- Hang a "DO NOT OPERATE" tag in operator station.

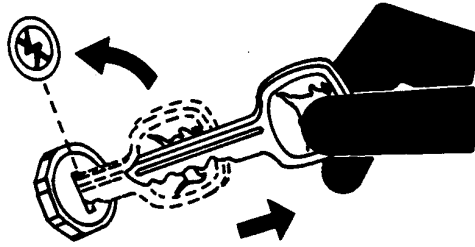

T5230 —UN—24MAY89

DX,PARK -19-04JUN90-1/1

Part List

Part Number	Description	Quantity
12M7066	Lock Washer	1
14M7274	Hex Nut	1
24H1305	Washer	2
R554835	Instructions	1
RE561252	Bracket	1
RE574454	Tie Rod Assembly	1
RE576490	Ball Stud	1


CB33994,0000DE1 -19-04MAR15-1/1

Assemble Tablet Holder

1. Select proper end caps. End caps (A) fit Motorola™ Xoom™ and similar. End caps (B) fit iPad™ and similar.

A— Motorola™ Xoom™ and Similar End Caps


B— iPad™ and Similar End Caps

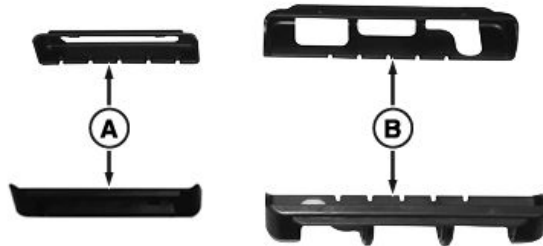


RXAC147500 —UN—04MAR15

Continued on next page

CB33994,0000DE6 -19-06MAR15-1/3

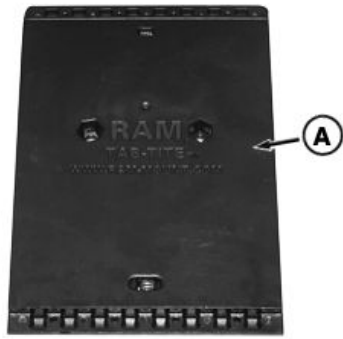

RXA0147501 —UN—02MAR15

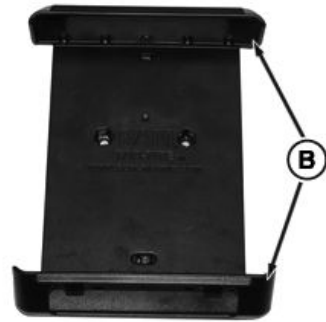

RXA0147502 —UN—02MAR15

A— Tablet Holder **B— End Caps**


2. Install end caps (B) into tablet holder (A) with supplied screws.

NOTE: Top end cap is spring loaded for tablet installation.

CB33994,0000DE6 -19-06MAR15-2/3




RXA0147503 —UN—02MAR15

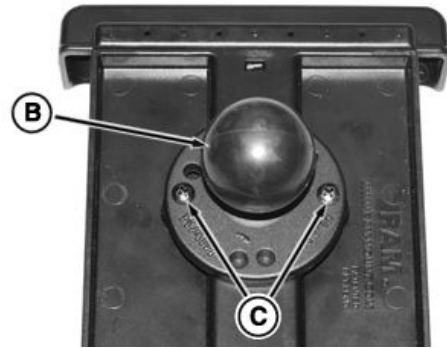

RXA0147504 —UN—02MAR15

3. Install two lock nuts (A) with nylon towards face of tablet holder.
4. Install mounting ball (B) with two cap screws (C). Hold lock nuts (A) in place while installing cap screws.
5. Install double socket arm (D) to mounting ball with spring away from mounting ball.

A— Lock Nuts **C— Cap Screws**
B— Mounting Ball **D— Double Socket Arm**

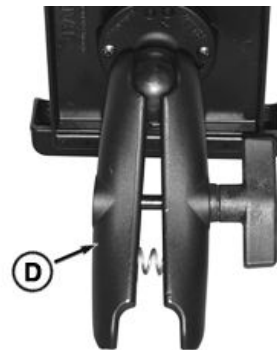


RXA0147505 —UN—02MAR15

CB33994,0000DE6 -19-06MAR15-3/3

Install Tablet Holder Assembly onto Accessory Mount



RXA0147506 —UN—06MAR15

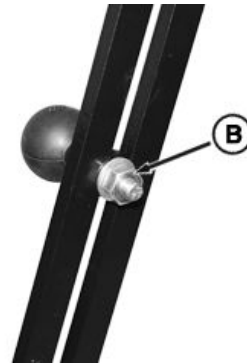

RXA0147507 —UN—02MAR15

1. Position mounting ball with stud (A) with a flat washer in desired location of accessory rail.
2. Install flat washer, lock washer, and hex nut (B). Tighten hex nut (B).
3. Loosen T-handle on double socket arm and install tablet assembly (C) onto mounting ball. Place tablet holder in desired position and tighten T-handle.

NOTE: Tablet holder top end cap is spring loaded. Mount holder with spring loaded end cap in 'up' position.



RXA0147508 —UN—06MAR15


A— Mounting Ball with Stud C— Table Holder Assembly
 B— Hex Nut

CB33994.0000DE3 -19-05MAR15-1/1

Install Tablet Holder Assembly onto Corner Post



RXA0147509 —UN—04MAR15

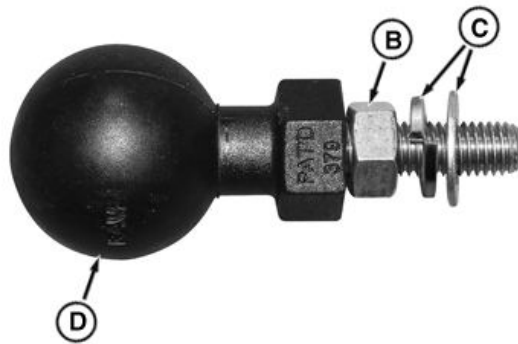


RXA0147510 —UN—05MAR15

A— Plug C— Washer
 B— Hex Nut D— Mounting Ball with Stud

1. Select desired corner post position and unscrew plug (A).
2. Install hex nut (B), flat and lock washers (C), onto mounting ball with stud (D).

Continued on next page

CB33994.0000DE4 -19-05MAR15-1/2

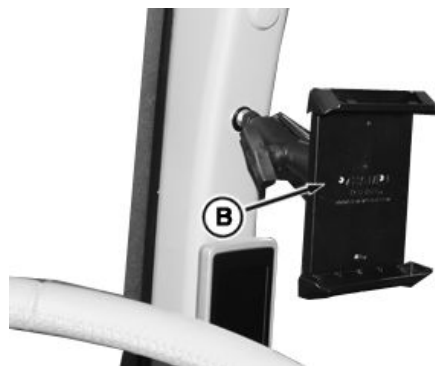

RXA0147511 —JUN—04MAR15

RXA0147512 —JUN—04MAR15

A— Mounting Ball with Stud B— Tablet Holder Assembly

3. Install mounting ball with stud (A) into corner post fitting. Tighten mounting ball hex nut against corner post fitting.
4. Loosen T-handle on double socket arm and install tablet holder assembly (B) onto mounting ball (A).
5. Place tablet holder (B) in desired position and tighten T-handle on double socket arm.

NOTE: Tablet holder top end cap is spring loaded. Mount holder with spring loaded end cap in 'up' position.

CB33994,0000DE4 -19-05MAR15-2/2

